Sales: CityCom GmbH, Amerang
www.tt-pc.com

TechnoTrend
Performance on your side.

Quick Start Guide

TT-budget® S2-3200
TT-budget® S2-1600
TT-budget® S-1401
TT-budget® C-1500
TT-budget® C-1501
TT-budget® S-1500
TT-budget® T-1500
TT-budget® T-3000
TT-budget® CI

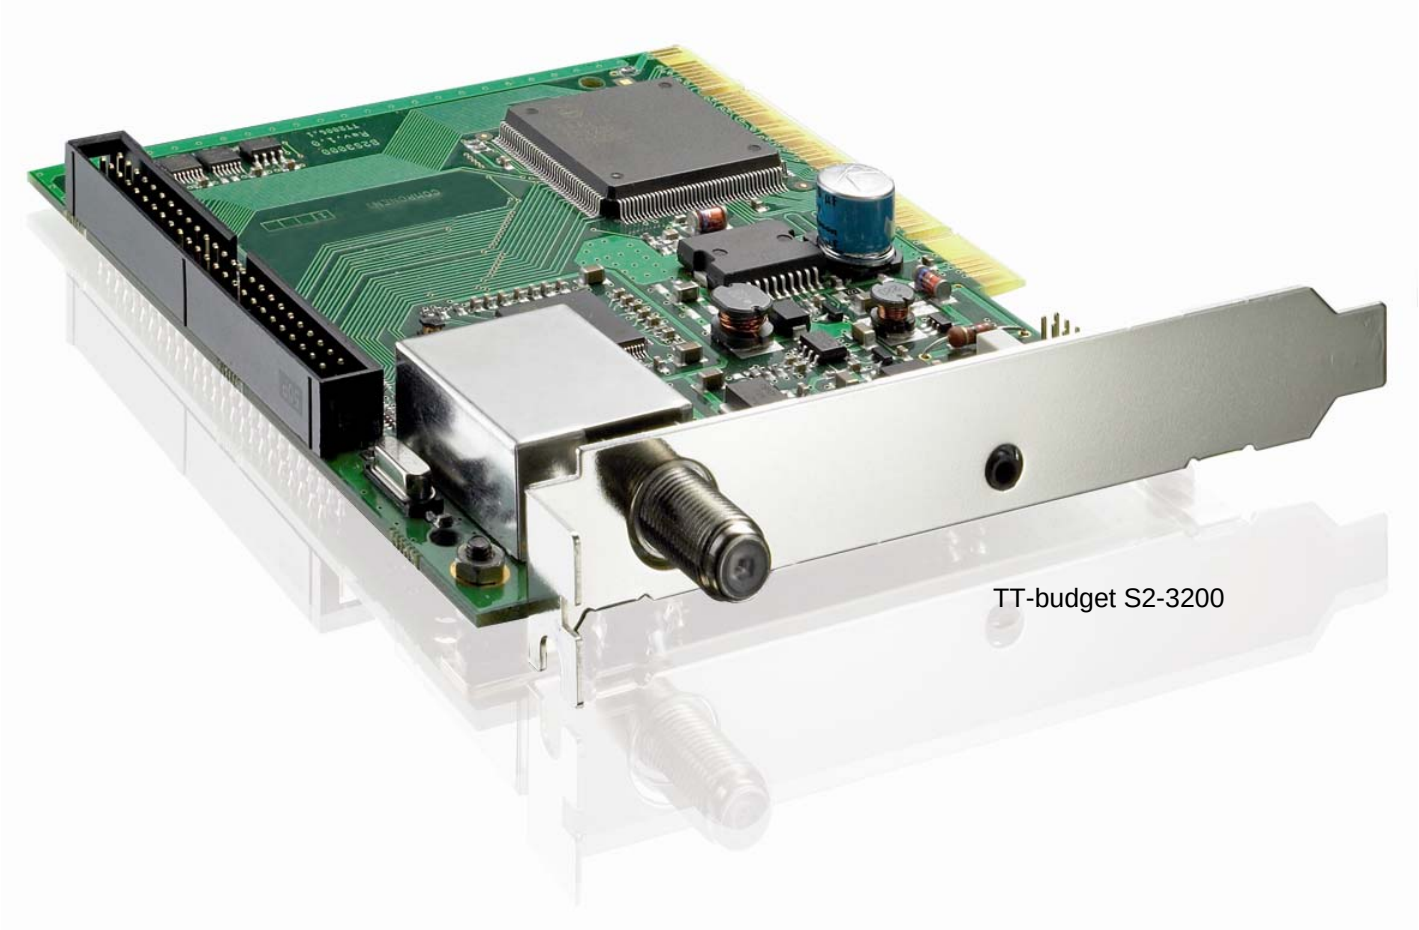

TT-budget S2-3200

CityCom GmbH © 2009

1. Safety and environmentalism

Please comply with the following safety advices to avoid deficient functions, damages and also accidents.

• Hazard for children

- Never let children be unattended with this appliance. Children underestimate the danger of using electric appliances.
- Batteries could be deadly when they are swallowed. Preserve batteries unreachable for infants. If a battery was swallowed, medical help has to be claimed.
- Keep children away from packaging. Danger of suffocation exists.

• Hazard via electricity

- The PCI-card might not be touched by drop- or condensed water. Prevent that fluidity reach into the PCI-card. In emergency move out the power plug immediately.
- Never put vases, coffee cups or things like that on the PC.
- The socket has to be available to pull out the power plug immediately.
- Pay attention that the conductions are not wedged or bruised.
- Do not use the PCI-card when the appliance is seeable damaged or the appliance has been fallen down.
- Pull out the power plug immediately if obvious disruptions take place (e.g. Smoke) during the utilization. Always finger the plug and never the cable by pulling out the power plug.
- Sockets and extension cords may not be overloaded. Fire hazard! Ask for the permissible current consumption.
- To separate the PC from power supply the power plug has to be pulled out of the socket.
- Adjustments should be committed by specialized personnel. The fabricator is not responsible for user accidents that happen at the opened PC.
- Do not modificate the appliance.
- Just use supplied cables, power plugs or recommended accessory to avoid fire risk and electric shock and also to obviate disruptions.
- Appliances could be damaged when they are connected to a power supply system during a thunderstorm. Please pull out the power plug during a thunderstorm.

• Hazard via injuries by other causes

- Pay attention that you do not stumble over the conductions.
- Batteries may not be thrown into fire, taken apart or short circuited

• Advices for dealing with batteries

- Change the batteries at latest once a year to exclude run out.
- Take the batteries out of the remote control after disusing the appliance for longer time.
- Never attempt to reactivate used batteries with warmth, loading or other means.
- Batteries may not be taken a part.
- Batteries may not be short circuited.

• Further advices

- Do not place open fire sources like candles on the appliance.
- Pay attention to the preinstructed operation temperature of your PC.
- Condensed water can be build into the appliance or the PC, for example when the appliance comes from cold into warm surroundings. Wait one hour before using the PCI-card.
- Dampness can cause short circuits by electrical appliances. The appliance can be damaged by that. Pretend the PC and the conductions to dampness.
- In some cases disturbance of functionality (i.e. interference of audio or video) can appear through influence from the outside (i.e contact or electrostatic discharge). Please restart the application or disconnect the device from the power, in order to restore the function.

• Disposal of batteries and appliance

- Every consumer is obligated by law to give batteries to a collecting point of his community/borough, to recycle them in a save way for environment.
- Deliver batteries in empty state.
- If you could not use the PCI-card any more, ask for indispensable measures to deliver the box at the responsible waste delivering organization. It is not allowed to throw the PCI-card into domestic waste.

2. First steps

Connection schematic (TT-budget S2-3200, TT-budget S-1500, TT-budget C-1500, TT-budget C-1501, TT-budget T-1500)

1. **Connector for satellite antenna, cable connection or house/room antenna ***
2. **Connection for IR-receiver***

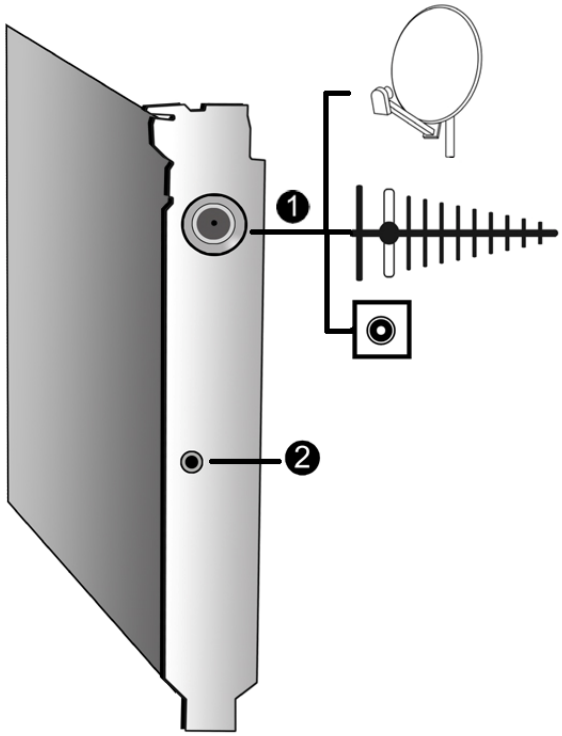

* depending on what product was bought

• Step 1: Connecting the hardware

Attention: Pay attention that all appliances are turned off before you connect the PCI-card.

1. Turn off the PC, move out the power plug, stick the PCI-card into an empty PCI-slot and screw it on.
2. Connect the PCI-card aerial jack with your aerial device. A relevant cable is required to connect the aerial. Please observe that the cable quality is essential for reception performance. Stick in the power plug and turn on the PC.

• Step 2: Installation of the device driver

>> Advice: Administrator-rights are needed for installation. Please note additional installation advices of your PC.

1. Turn on your PC and log in with your user identification if necessary.
2. The operating system identifies the appliance automatically and asks you to install the adequate device driver. Insert the supplied CD in your CD ROM drive. The adequate

device drivers and the device driver information are placed in the main index of the installation-CD.

3. Instruct the operating system to use the driver information from the CD.
4. Maybe you have to restart the PC after installing the device driver.

• Step 3: Installation application software

1. Open the Explorer and start the Installation with double click on the file “Setup.exe“
2. Thereupon the software installation starts. The setup program will lead you through the TV-Software installation. Here you can select several options.
3. Leave the set up program with the button “complete“ after successful installation.
4. Now you can start the program over the start menu

• further information

You will find specified directives and further advices about the installation of certain appliances in the supplied CD handbook.

3. Connection of Common Interface (optionally)

• Step 1: connecting the hardware

Attention: Pay attention that all appliances are turned off before you connect the PCI-card.

1. Turn off the PC, move out the power plug, stick the Common Interface into an empty PCI-slot and screw it on.
2. Connect the CI and the DVB-PCI-Card with the supplied cable. Stick the CAM with Smartcard into the CI.
3. Stick in the power plug and turn on the PC.

• Step 2: Installation

>> Advice: Please avoid to remove the CAM out of the Common Interface during a utilization. The application can breake down.

1. As soon as the CI was recognized by the PC a pink CI button appears in the TT-Media Center. In the software TT-Viewer the entry „Conditional Access Modul“ will be active.
2. After recognizing the CAM the CI button turns into red. To change the CI setup you have to push the CI button.

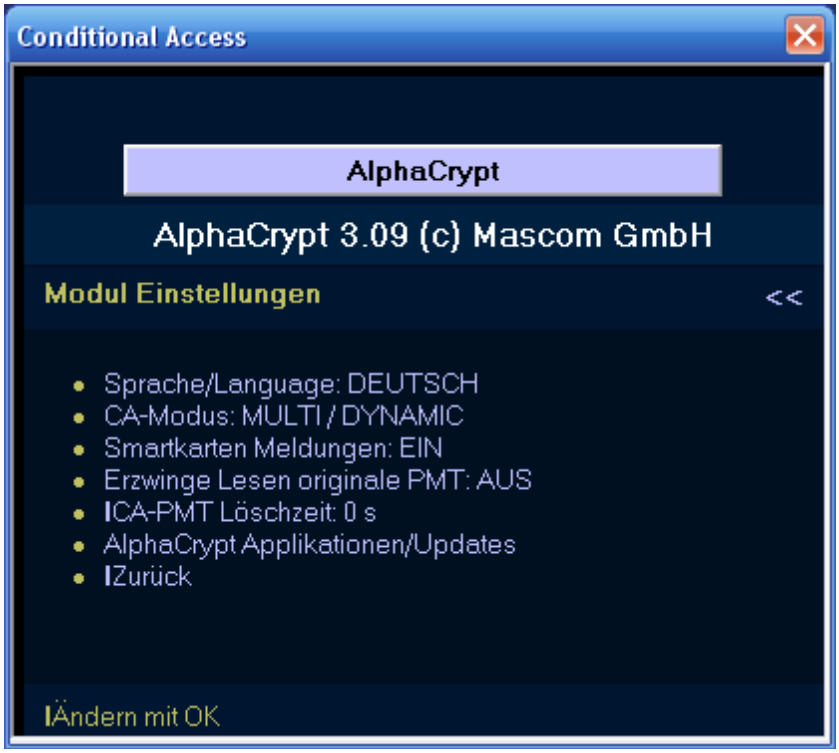

70932000027/2609

Technical changes and mistakes reserved!